



# Pinkwood PKjoist® with WEBSHIELD® Panels Alternate Fastening Allowances




## WEBSHIELD Attachment Means

**IAPMO UES ER-0431 Section 3.3.2.2 Installation with Fasteners:** The WEBSHIELD Panels may be pre-installed by the manufacturer or installed on-site by certified installers using No. 16 gauge, minimum 7/16 inch crown staples in accordance with **Figure 7** of this report. Alternate fasteners may be used as described and installed in accordance with the manufacturer's published installation instructions.

### Official Publication: WSG-PKIUSA01 2/19 states:

When 7/16" crown staples are not available, other fasteners with greater load carrying capacity may be substituted. This includes nails (8d common/gun or larger), screws (#6 size or larger) and through bolts (.125" diameter or larger).

- When nails extended through the opposite side, clench to ensure connection.
- Fastener locations as indicated below.

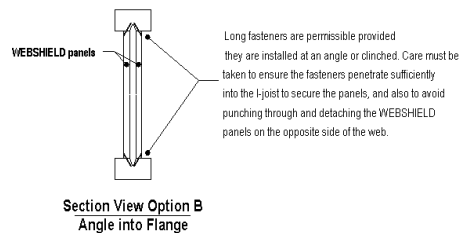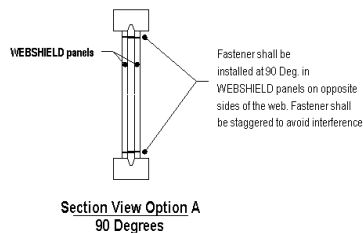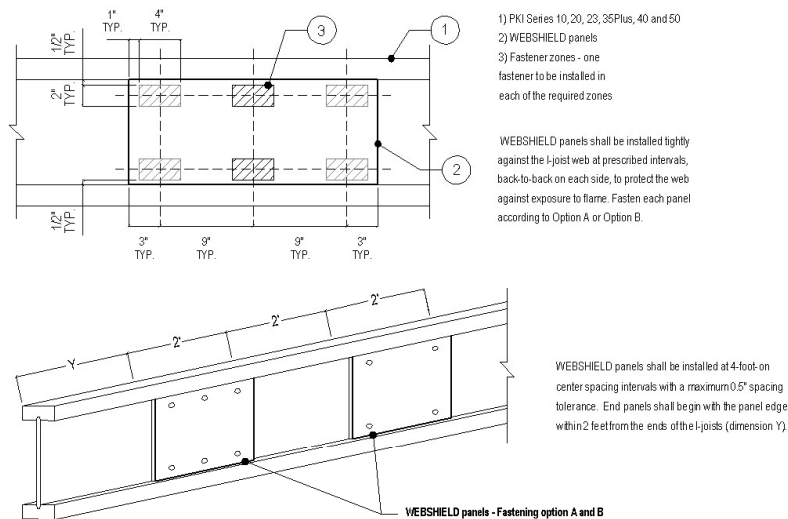

For SI: 1 inch = 25.4 mm

If you have any questions, please contact XP-EWP for details.

Pinkwood®, PKjoist® and WEBSHIELD® are registered trademarks and not the property of XP-EWP. Contact their respective owners for information.

XP-EWP

14523 S. Palo Alto Drive,  
Herriman UT 84096

Contact johnd@xp-ewp for more details

**TECHNICAL BULLETIN**  
**TB28**

January 2026